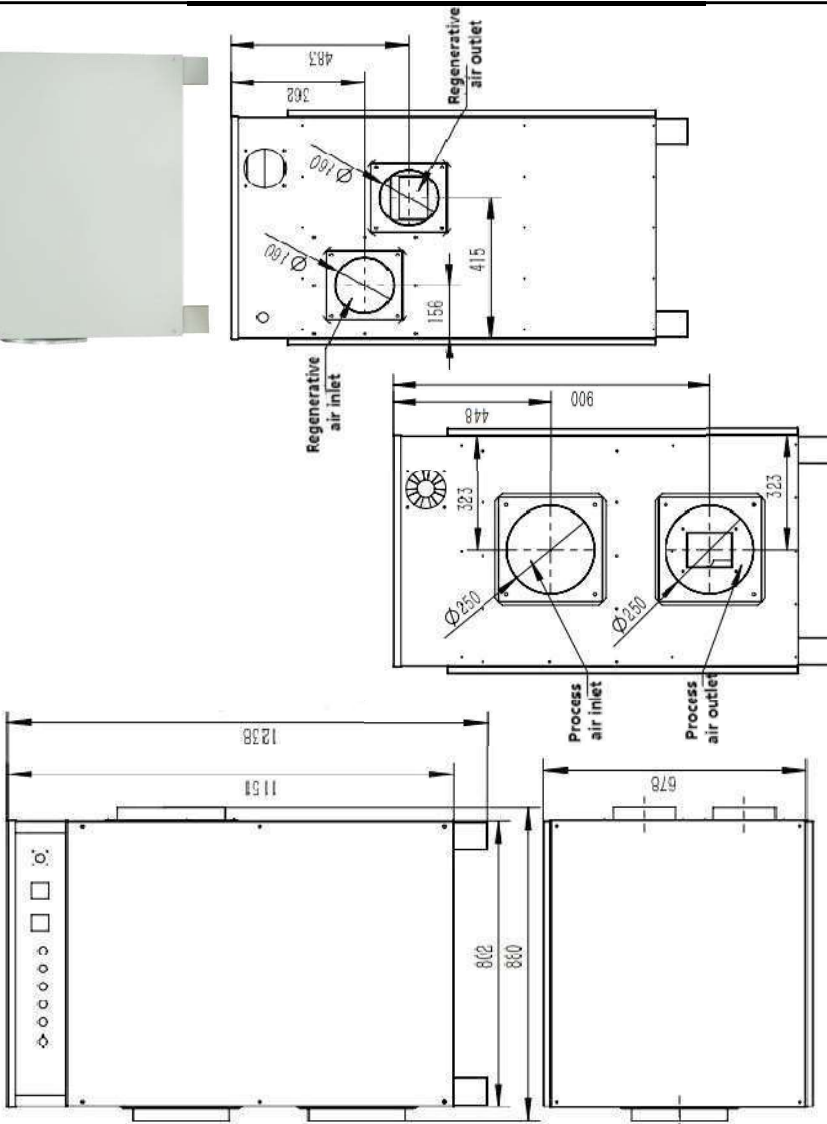
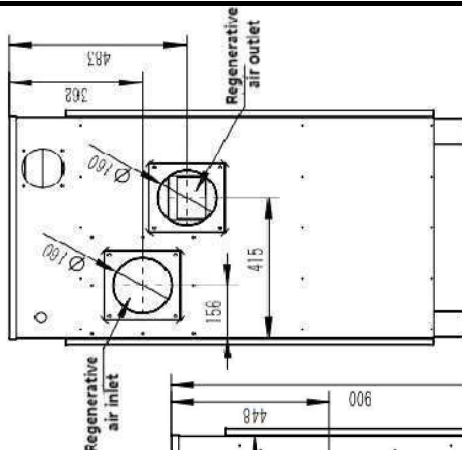
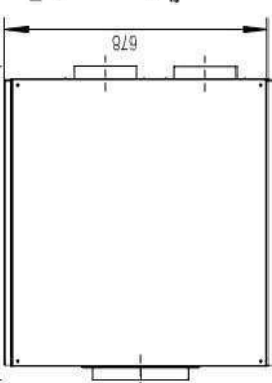


Model	RY-1200M	CONSTRUCTIONAL FEATURES 1. Sturdy housing in stainless steel 2.High performance at low temperatures and low relative humidity in a room. 3.Sweden Profute Silica gel adsorption wheel ,washable, recycled, environmental protection 4.Automatic/manual mode, automatically ON/ OFF according to the room humidity 5.1-24 hour timer switch 6.485 communication interface
Voltage	380V/60HZ	
Rated power	13kw	
Rated current	20.5A	
Dehumidification Capacity	8.5kg/h at T=20°C; RH=60%	
Process air		
Rated airflow	1250m³/h	
External residual pressure	200Pa	
Connection inlet Ø	250mm	
Connection outlet Ø	250mm	
Reactivation air		
Rated airflow	450m³/h	
External residual pressure	150Pa	
Connection inlet Ø	160mm	
Connection outlet Ø	160mm	
Other data		
Operating temperature	-10/+50°C	
Machine size	880*678*1238mm	
Weight (packaging excluded)	155kg	
Filter	G4 (customizable)	