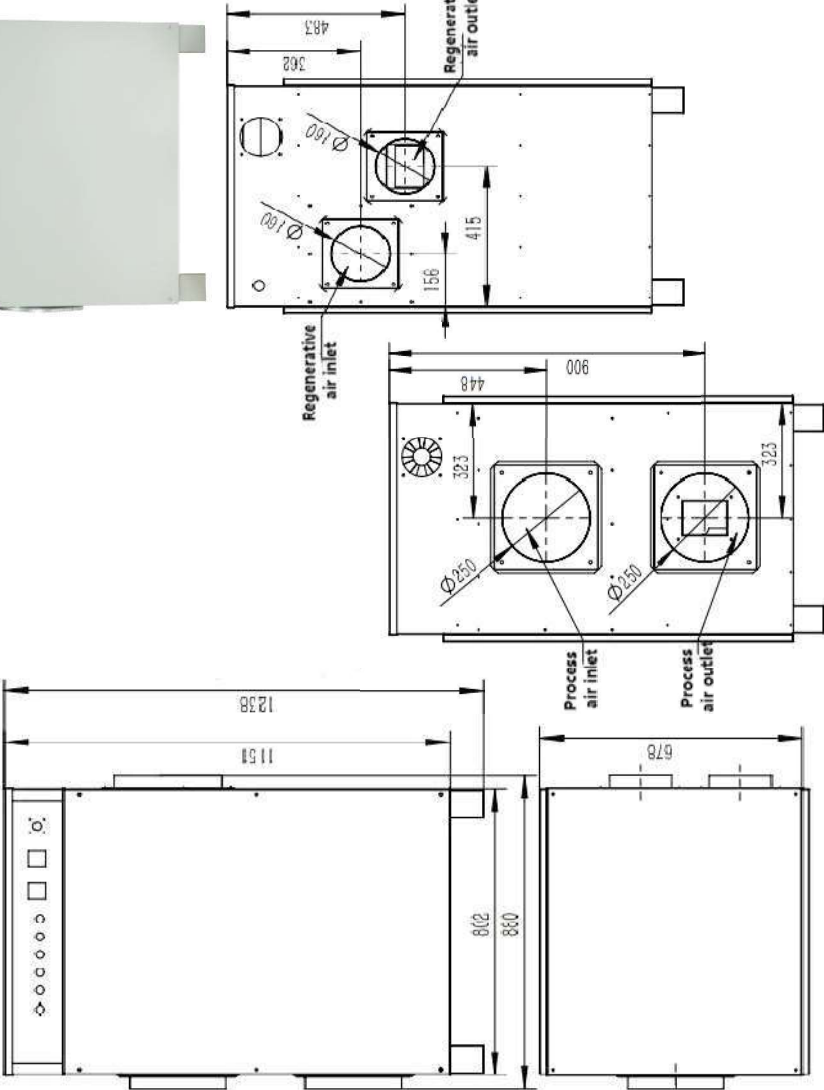


Model		RY-1500M	CONSTRUCTIONAL FEATURES 1. Sturdy housing in stainless steel 2.High performance at low temperatures and low relative humidity in a room. 3.Sweden Profute Silica gel adsorption wheel ,washable, recycled, environmental protection 4.Automatic/manual mode, automatically ON/ OFF according to the room humidity 5.1-24 hour timer switch 6.485 communication interface
Voltage		380V/60HZ	
Rated power		15kw	
Rated current		26A	
Dehumidification Capacity		10kg/h at T=20°C; RH=60%	
Process air			
Rated airflow		1550m³/h	
External residual pressure		200Pa	
Connection inlet Ø		250mm	
Connection outlet Ø		250mm	
Reactivation air			
Rated airflow		580m³/h	
External residual pressure		150Pa	
Connection inlet Ø		160mm	
Connection outlet Ø		160mm	
Other data			
Operating temperature		-10/+50°C	
Machine size		880*678*1238mm	
Weight (packaging excluded)		157kg	
Filter		G4 (customizable)	