
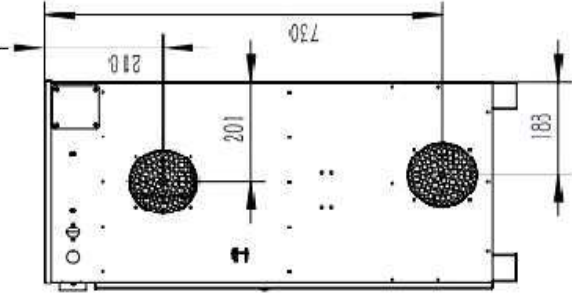
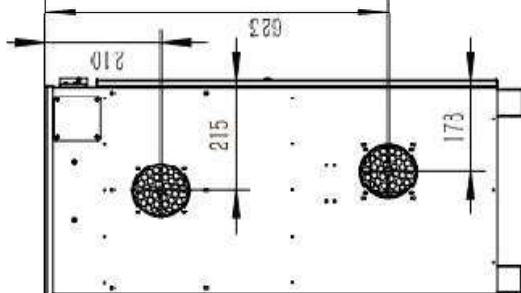
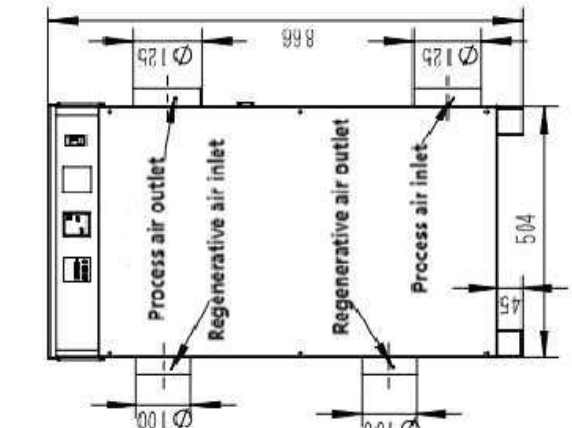
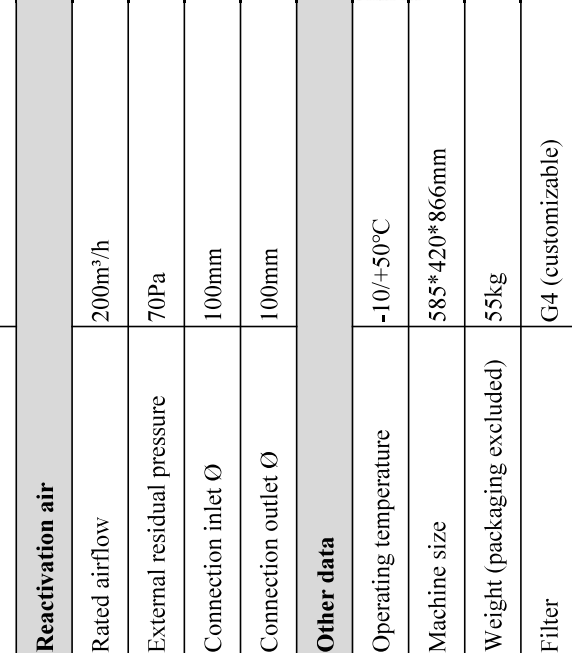


Model	RY-600M	CONSTRUCTIONAL FEATURES 1. Sturdy housing in stainless steel 2.High performance at low temperatures and low relative humidity in a room. 3.Sweden Profute Silica gel adsorption wheel ,washable, recycled, environmental protection 4.Automatic/manual mode, automatically ON/ OFF according to the room humidity 5.1-24 hour timer switch 6.485 communication interface	
Voltage	220V/60HZ		
Rated power	4.5kw		
Rated current	20A		
Dehumidification Capacity	3kg/h at T=20°C; RH=60%		
Process air			
Rated airflow	580m³/h		
External residual pressure	100Pa		
Connection inlet Ø	125mm		
Connection outlet Ø	125mm		
Reactivation air			
Rated airflow	200m³/h		
External residual pressure	70Pa		
Connection inlet Ø	100mm		
Connection outlet Ø	100mm		
Other data			
Operating temperature	-10/+50°C		
Machine size	585*420*866mm		
Weight (packaging excluded)	55kg		
Filter	G4 (customizable)		